




# Q-Max 160 - 560 m<sup>3</sup>/h

## TECHNICAL DATASHEET

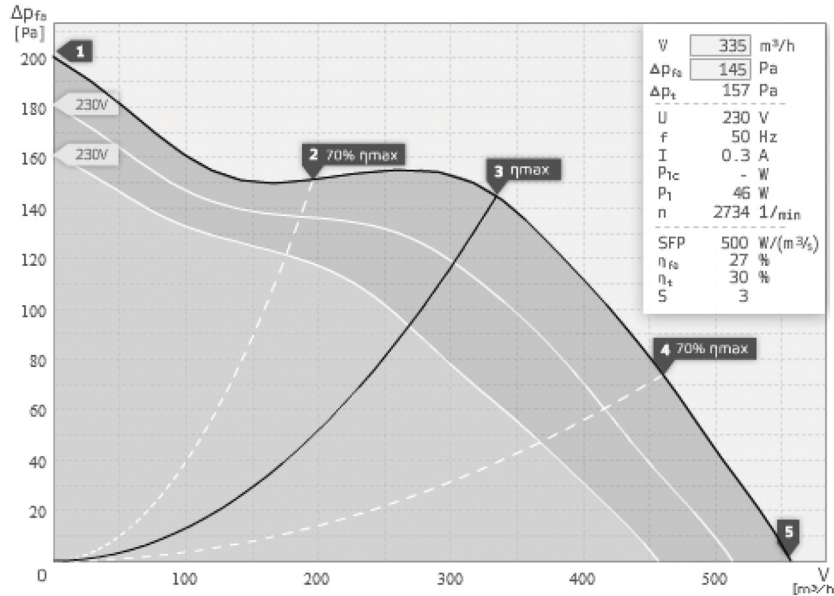

- with integrated diagonal fan ETAMASTER
- Sound insulated metal casing
- With 3-step switch
- Integrated thermal switch

Operating Point		1	2	3	4	5
Current I	A	0,3	0,3	0,3	0,3	0,3
Power Consumption P1	W	41	41	46	47	45
RPM n	1/min	2810	2801	2734	2737	2758
SPL inlet LWA5	dB(A)	58	59	60	63	63
SPL outlet LWA6	dB(A)	57	56	60	64	64
SPL casing break out LWA2	dB(A)	55	55	56	58	57

Sound power (LW) dB(A)		Medium Frequency Band								
		Σ	63	125	250	500	1k	2k	4k	8k
Inlet	LWA5	60	31	47	56	55	53	45	44	34
Outlet	LWA6	58	30	44	56	54	48	39	36	26
Casing	LWA2	56	28	33	44	53	51	39	30	20

Q-Max AC 160, 560, 3 speed   132090	
Voltage UN	230 V 1~
Current Imax	0,3
Ambient Temperature tA	40 °C
Medium Temperature tM	40 °C
Speed Control	3-2-1
Motor Protection	TAI
Isolation Class	F
Weight	0 kg

